### INCH DUO

LAYING GROUNDS FOR A LASTING E-MOBILITY

## ELECTRIC CARS ARE NOT ECO-FRIENDLY\*

\*by themselves. They could however contribute enormously to the grid efficiency. This is where we step in. Instead of seeing them as a problem, we see them as a solution for the energy grid.


### Interactive charging technology

Etrel charging equipment runs on an interactive charging platform. Interactive charging technology maintains a balance between vehicle, building and grid demands.

Within the platform, a set of guiding principles enabled by artificial intelligence and system communication capabilities offer the fastest eco-friendly charging in given circumstances without grid connection point overloads.

#### Interactive charging layers


INTERACTION WITH THE USER

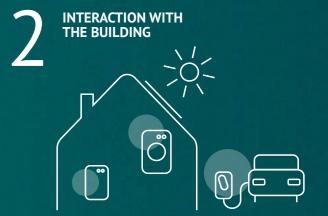



Learn more about interactive charging and our effort to make e-mobility great on www.etrel.com

INTERACTION WITH OTHER CHARGING STATIONS

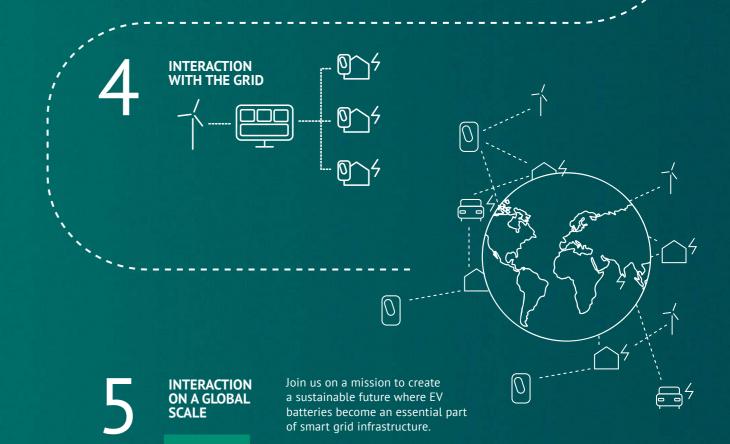

### INCH DUO



#### Distinctly different.

INCH Duo is a durable charger, ready for continuous operation in demanding public locations. Ergonomic design and a large display with straightforward charging instructions combined with adhoc payment option offer convenience for new users. Optional integration with external sensor devices like parking sensors help enhance infrastructure accessibility and optimise usage patterns.

Multi level load balancing capabilities with cluster connectivity, ensure fair distribution of charging power among plugged-in vehicles while respecting the grid connection point limitations.


- Contactless credit card payment and straightforward user interface deliver simplified charging experience.
- Dynamic power management in clusters contributes to the scalability of charging infrastructure, lowering the initial investment.
- Easy installation with a wide-angle door opening and modular components shorten the field time and simplify maintenance.

USE CASES	Apartment buildings	Commercial buildings	Hospitality	Car Parks		
O INCH Duo		•	•	•	(	
Max charging power	2 x 22 kW	/ (3 x 32 A <sub>j</sub>	oer connect	tor) adjustal	ble	
	2 x Type 2	2 x Type 2 socket with cable lock				
Level of protection	IP 54, IK 1	IP 54, IK 10				
Electrical protection	DC fault o RCD Type	DC fault current sensor 6 mA + RCD type A or RCD Type A EV or RCD Type B, MCB char. C, 40 A				
User identification	PIN code,	PIN code, RFID, App*, SMS*				
Direct payment	Yes, with	Yes, with NFC payment terminal				
Communication	Ethernet,	Ethernet, Wi-Fi, 4G LTE				
EV communication	IEC 6185	IEC 61851 supported, IEC 15118 ready				
Connectivity	OCPP 1.6 ing), Mode	OCPP 1.6 SOAP & JSON, OCPP 2.0 JSON (upcoming), Modbus TCP				
Load balancing	Yes, static Guard	Yes, static and dynamic load balancing with Load Guard				
Clustering	Yes, with	Yes, with floating master				
Energy meter	Class 1 M	Class 1 MID energy meter				
Smart building integration	Yes, Modb	Yes, Modbus TCP supported				
User interface	App* or e	App* or embedded web interface				
Material		Stainless steel with anti-corrosion protection and polycarbonate display cover				
Colour options	White and	White and black, or grey and black				





Podpora | Support + 386 41 501 1978 EVSE number SI-5482394

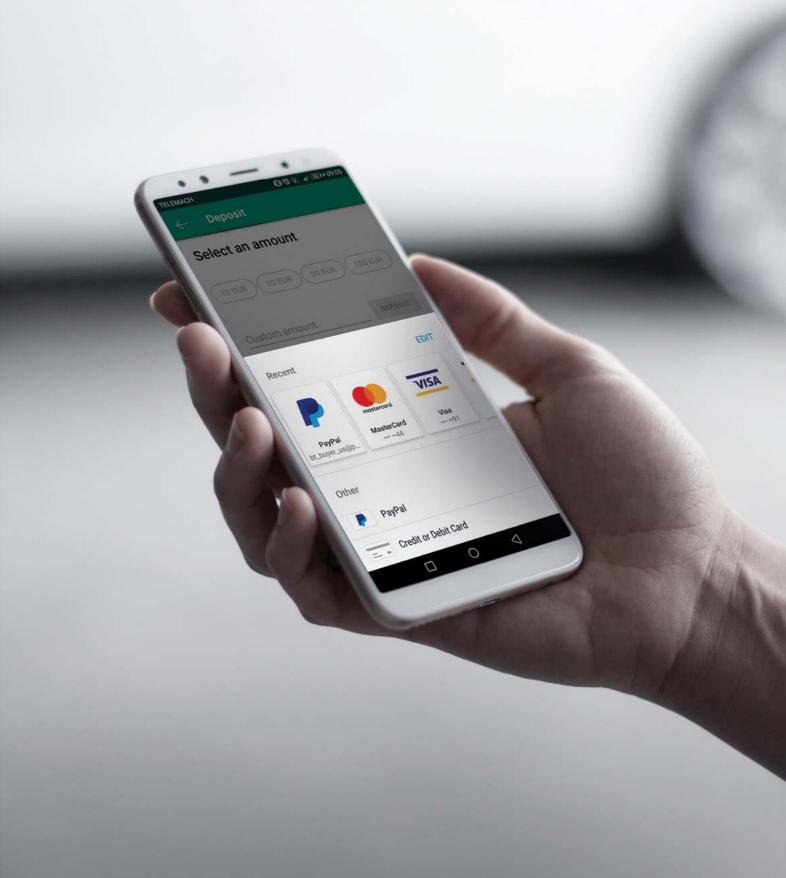


ETREL provides building blocks for a diverse range of e-mobility ecosystems. INCH interactive charging stations combined with OCEAN charging management software, can serve as a backbone of any e-mobility business.

# 40+

#### **Countries**

Etrel solutions are in use in more than 40 countries all over the world.

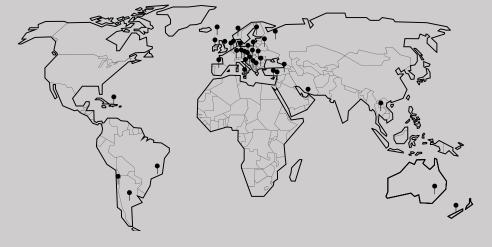

Scan the code and visit www.etrel.com to learn more about our company.

